


DATE	SYM	REVISION RECORD	ECO	DWN	ENG	MFG
2019-01-16	00	INITIAL RELEASE	0124	AC	AC	SL

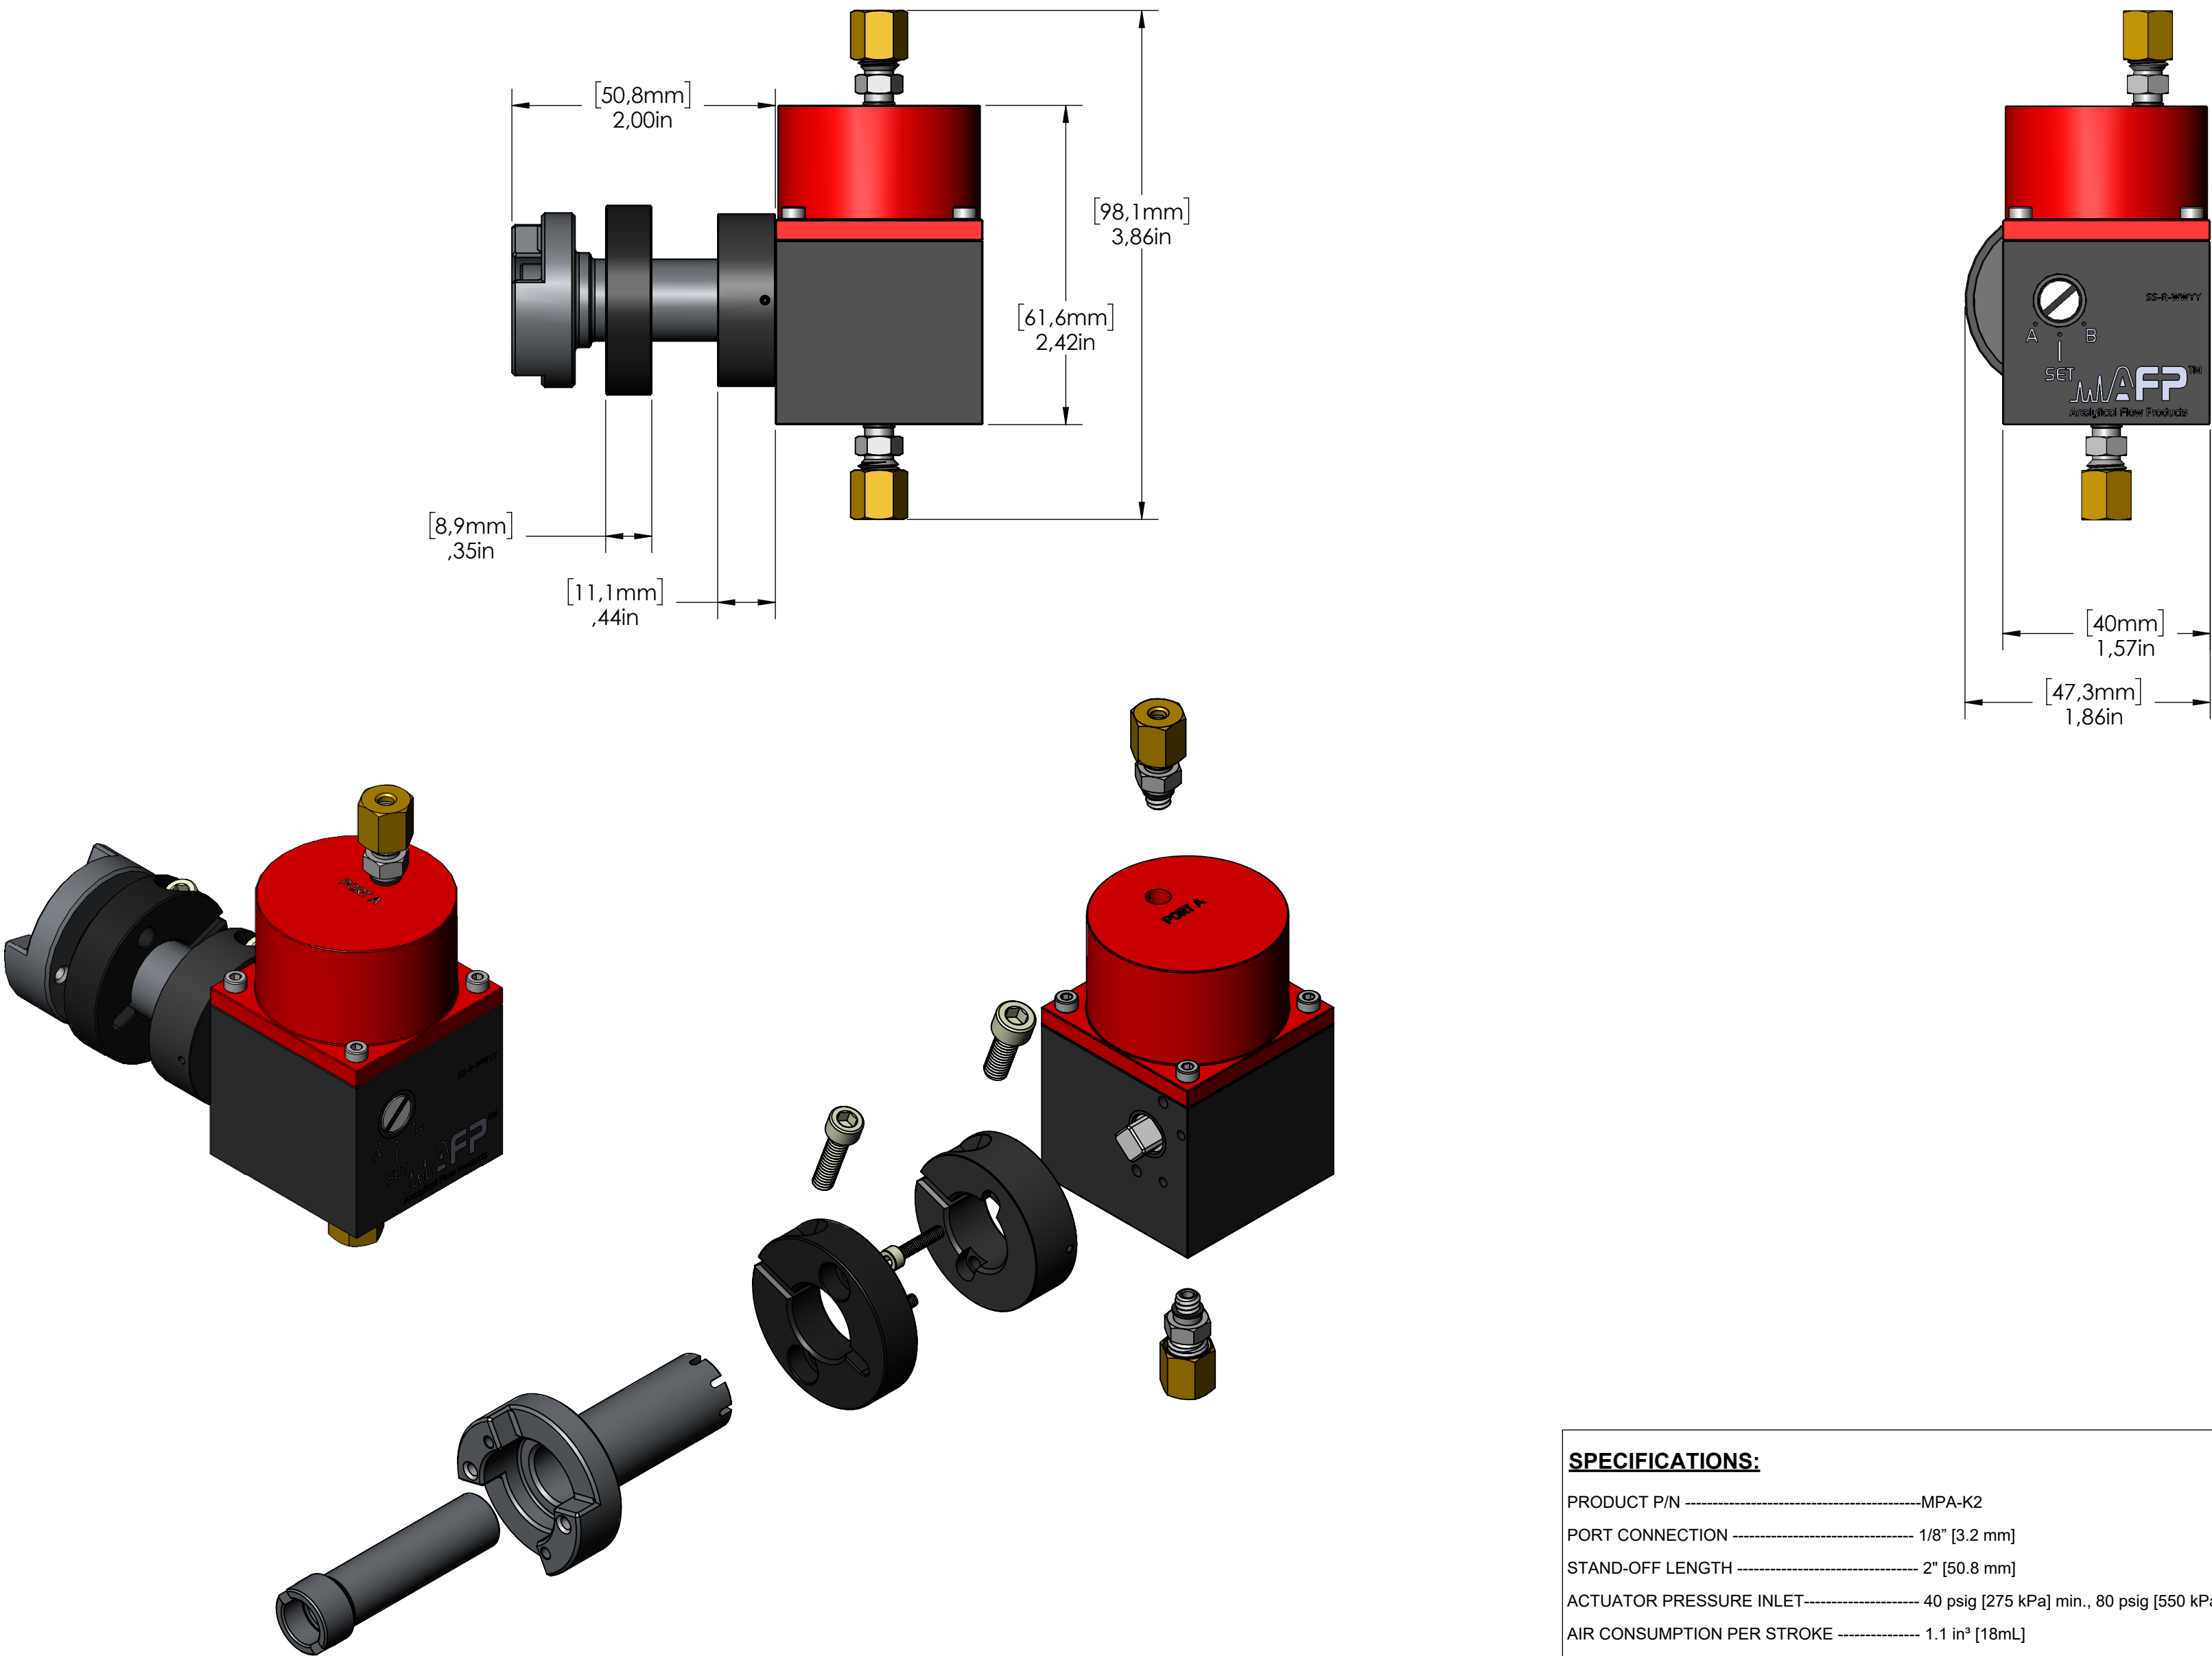

SPECIFICATIONS:					
PRODUCT P/N	MPA-K2				
PORT CONNECTION	1/8" [3.2 mm]				
STAND-OFF LENGTH	2" [50.8 mm]				
ACTUATOR PRESSURE INLET	40 psig [275 kPa] min., 80 psig [550 kPa] max.				
AIR CONSUMPTION PER STROKE	1.1 in³ [18mL]				
ACTUATOR MAX. WORKING TEMP.	257°F [125°C]				

UNLESS OTHERWISE SPECIFIED: - ALL DIMENSIONS ARE IN INCHES - SURFACE FINISH IS IN Ra MICROINCHES (µIN) - UNSPECIFIED SURFACES MUST BE 64 Ra µIN OR BETTER - REMOVE ALL BURRS & SHARP EDGES .003-.010 - TOLERANCES ARE: XX ±.010 FRACTIONAL ±1/64" XXX ±.003 ANGULAR ±5° XXXX ±.001 - UNSPECIFIED INSIDE CORNER RADIUS 0.010 MAX. - REFER TO 3D MODEL FOR DIMENSIONS NOT SHOWN. - TOLERANCE .XX APPLIES - DO NOT SCALE DRAWING	MATERIAL:		 2659, boul. du Parc Technologique, Québec Québec, CANADA G1P 4S5 Tel: 418-338-0004 Fax: 418-338-2500 Email: info@afproducts.ca Web: www.afproducts.ca		
	FINISH: MS-1021		DESCRIPTION: Keyed 2" StandOff MPA Assembly		
	 ACCORDANCE WITH LATEST ASME Y14.5				
PROPRIETARY INFORMATION THIS DRAWING IS THE PROPERTY OF APN-AFP INC. IT IS RETURNABLE UPON REQUEST AND MUST NOT BE REPRODUCED OR THE INFORMATION CONTAINED HEREIN TRANSMITTED TO ANY UNAUTHORIZED PERSON OR ORGANIZATION WITHOUT THE WRITTEN CONSENT OF APN-AFP INC.	UNIT IN	SIZE C	DWG. NO. MPA-K2		REV. 00
	SCALE 1	•	SHEET 1 OF 2		